

INSPINIA 10 VT

10" Touch Panel - Datasheet



Color Options


● Black



Customization possibilities upon request


- Logo printing
- Glass color options - RAL and PANTONE colors are available

Product Side Views




Product Dimensions

Front and side view without back box (mm)

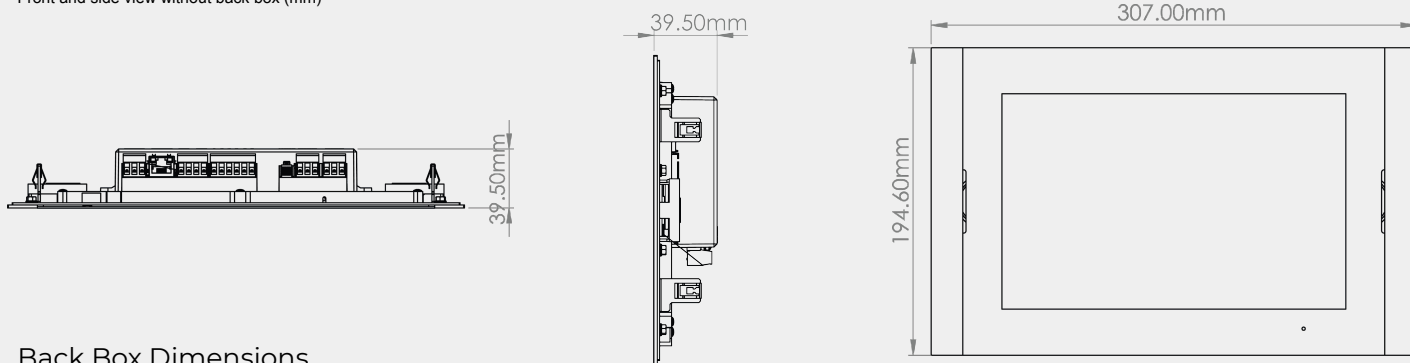

Back Box Dimensions

Isometric view back box (mm)

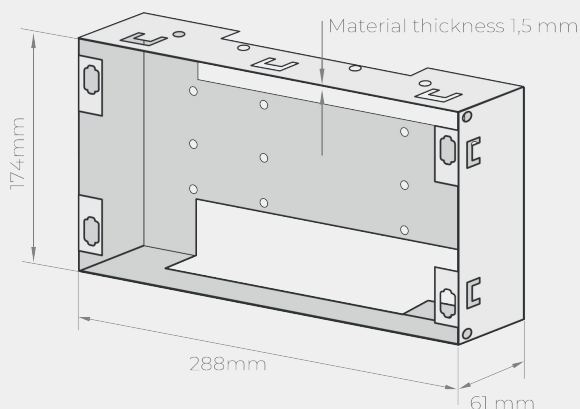

INSPINIA 10 VT

10" Touch Panel - Datasheet



BASED ON SKY THINGS FRAMEWORK

Technical Specifications

Hardware:	A64 Quad-Core 1.3 GHz / 1GB DDR3 Ram / 8GB Nand flash
	OS Android 6.0 with Inspinia Application up to 1000 UI objects and 2000 BMS points
	Initial license :1000 BMS points / No HVAC (VRV/VRF) point
Display:	IPS 8" 1280 x 800 resolution 350 cd/m2 luminance with 5 point capacitive touchscreen Vertical and horizontal working mode
Power Supply:	24 VDC POE IEEE 802.3at Power consumption max. 13W
Standard Interfaces:	1x LAN RJ45 10/100/1000Mbps interface 2x Add-On (Optional Interface) Port 5x Digital In (Optional Isolated) 2x Digital Out (Dry Contact 5A / 250V AC max) 1x Uni-port 2x 3 Watt Speakers 1x Mic Input
Optional Interfaces (Ref.):	KNX Twisted Pair (A-KNX) Bticino (SCS) Twisted Pair (A-SCS) RS485 (EIA-485) (A-RS4) DALI 2 (A-DALI) Galvanic isolated RS485 Modbus (A-GMD) VRF mainline communication (A-VXX) BLE Bluetooth 5.0 (A-ACIB) Zigbee 3.0 (A-ZGB)
Working Temperature & Humidity:	-10°C – +60°C 5% – 90% at 25°C

Certificates and Compatibility:



Order Code(s)

INS10VF


: Inspinia VT 10" Panel

INSPINIA 10 VT


10" Touch Panel - Installation Manual



PORTS & CONNECTIONS

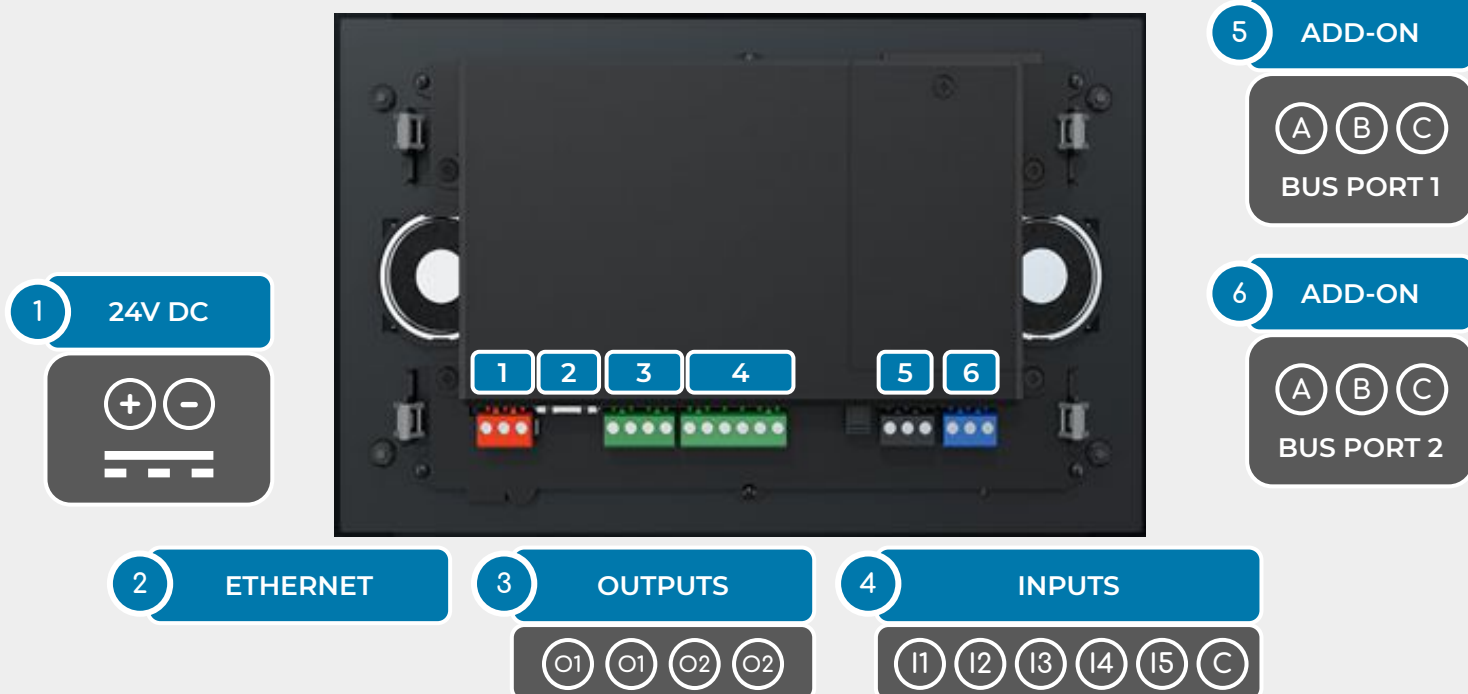

HOW TO MOUNT YOUR INSPINIA

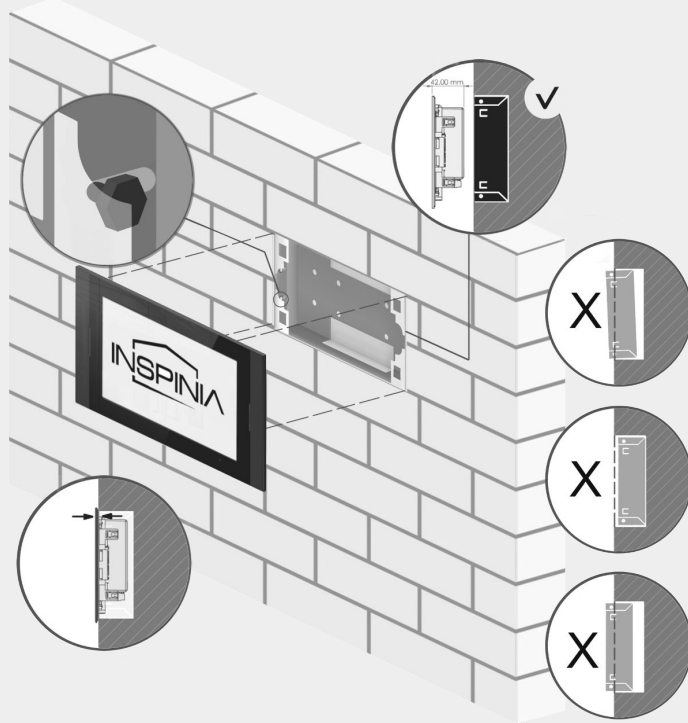

Local Web Interface

Default IP : 192.168.2.100
Username : admin
Password : aEuXW6gn

