

INSPINIA 8 VT

8" Touch Panel - Datasheet



Color Options

● Black



Customization possibilities upon request


- Logo printing
- Glass color options - RAL and PANTONE colors are available

Product Side Views




Product Dimensions

Front and side view without back box (mm)

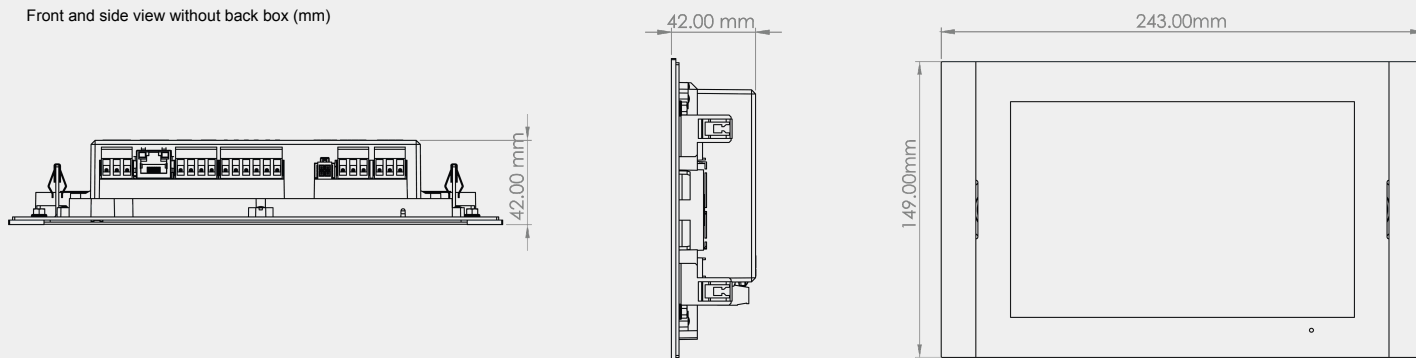

Back Box Dimensions

Isometric view back box (mm)

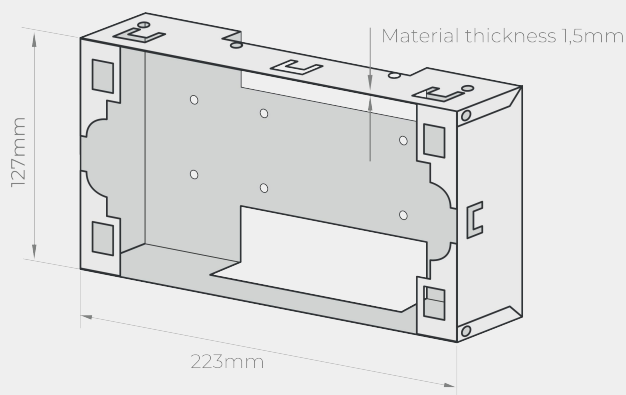

INSPINIA 8 VT

8" Touch Panel - Datasheet



BASED ON SKY THINGS FRAMEWORK

Product Specifications

Hardware:	A64 Quad-Core 1.3 GHz / 1GB DDR3 Ram / 8GB Nand flash
	OS Android 6.0 with Inspinia Application up to 1000 UI objects and 2000 BMS points
	Initial license: 1000 BMS points / No HVAC (VRV/VRF) point
Display:	IPS 8" 1280 x 800 resolution 350 cd/m2 luminance with 5 point capacitive touchscreen
	Vertical and horizontal working mode
Power Supply:	24 VDC
	POE IEEE 802.3at
	Power consumption max. 13W
Standard Interfaces:	(1x) LAN RJ45 10/100/1000Mbps interface
	(2x) Add-On (Optional Interface) Port
	(5x) Digital In (Optional Isolated)
	(2x) Digital Out (Dry Contact 5A / 250V AC max)
	(1x) UNI-Port (Peripherals port based on USB 2.0 OTG)
	(2x) 3 Watt Speakers
	(1x) Omni-directional Microphone
Optional Interfaces (Ref.):	KNX Twisted Pair (A-KNX)
	Bticino (SCS) Twisted Pair (A-SCS)
	RS485 (EIA-485) (A-RS4)
	DALI 2 (A-DALI)
	Galvanic isolated RS485 Modbus (A-GMD)
	VRV mainline communication (A-VXX)
	BLE Bluetooth 5.0 (A-ACIB)
	Zigbee 3.0 (A-ZGB)
Working Temperature & Humidity:	-10°C – +50°C
	5% – 90% at 25°C

Certificates and Compatibility:



Order Code(s)


INS8VF : Inspinia VT 8" Panel

INSPINIA 8 VT


8" Touch Panel - Installation Manual



PORTS & CONNECTIONS

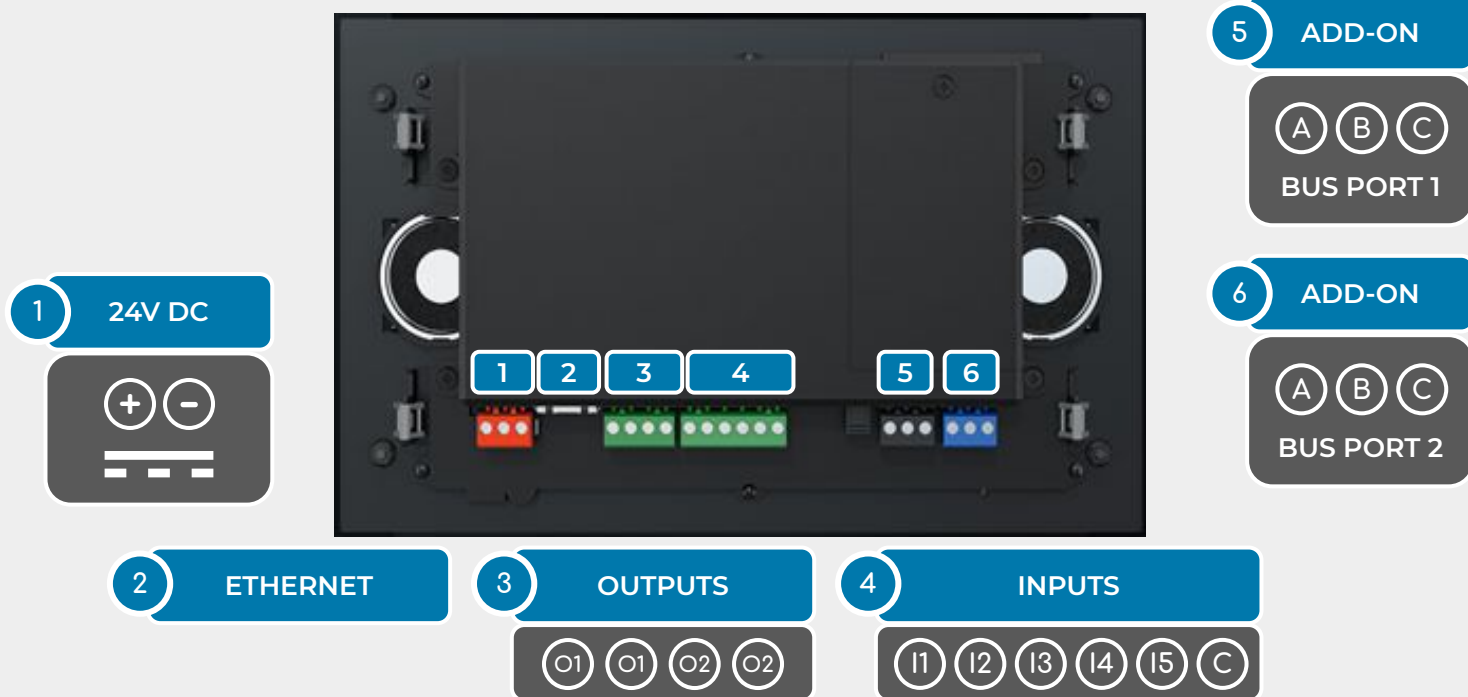

HOW TO MOUNT YOUR INSPINIA

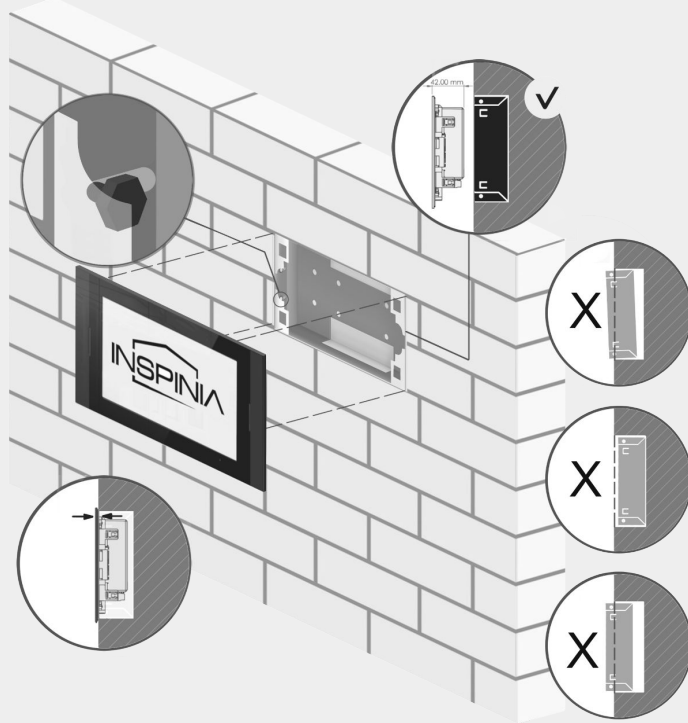

Local Web Interface

Default IP : 192.168.2.100
Username : admin
Password : aEuXW6gn

