

INSPINIA T9 SQ Keypad

9 Point Glass Keypad - Datasheet



Metal Frame Options

● Black




● Silver



● Gold





Product Side Views





Product Dimensions

Front view with and without metal frame (mm)

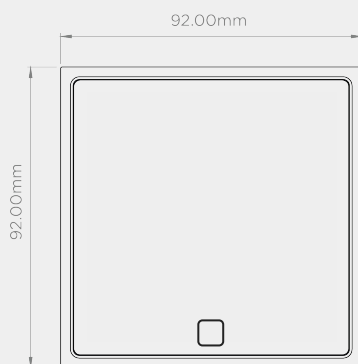


Back and side view with metal frame (mm)

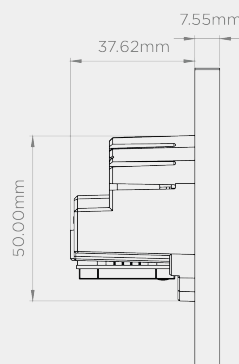

Required Back Box

EU Standard 1G, Isometric view (mm)

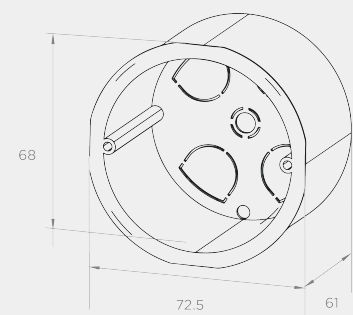


INSPINIA T9 SQ Keypad

9 Point Glass Keypad - Datasheet



BASED ON  SKY THINGS FRAMEWORK

Product Specifications

Hardware :	ARM A7 Single-Core 1.2 GHz / 128MB DDR3 Ram / 512 MB Nand Flash OS Linux 3.4 with Inspinia Application up to 1000 BMS points Initial license: 100 BMS points / No HVAC (VRV/VRF) point
Touch Pad:	1 to 9 Capacitive Touch Points RGB LED's for each pad
Standard Artwork (Ref.):	1 Point (AIT-S1P) 2 Points (AIT-S2P) 4 Points (AIT-S4P) 6 Points (AIT-S6P) 9 Points (AIT-S9P) 
Power Supply:	24VDC -or- 48 VDC In POE IEEE 802.3af Power consumption max. 10W
Standard Interfaces:	(1x) LAN RJ45 10/100Mbps interface (1x) Add-On (optional interface) Port (1x) Digital Out (open collector 5V 100mA) (1x) Digital In
Built-in Sensors:	Humidity sensor range 0% up to 100% RH Temperature sensor range -40°C up to +125°C
Optional Interfaces (Ref.):	KNX Twisted Pair (A-KNX) Bticino (SCS) Twisted Pair (A-SCS) RS485 (half-duplex) module (A-RS4) DALI 2 (A-DALI) Galvanic isolated RS485 Modbus (A-GMD) VRF mainline communication (A-VXX) Bluetooth Aircon (A-ACIB) Zigbee 3.0 (A-ZGB) 
Working Temperature & Humidity:	-10°C – +60°C 5% – 90% at 25°C
Certificates and Compatibility:	

Order Code(s)

IT-S9F
IT-S9F-M



: Inspinia SQ Keypad
: Inspinia SQ Keypad w/ Motion Sensor

INSPINIA T9 SQ Keypad


9 Point Glass Keypad - Installation Manual



PORTS & CONNECTIONS

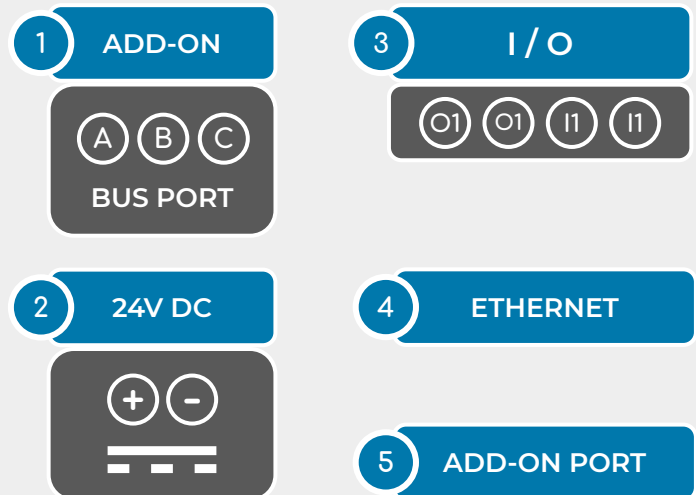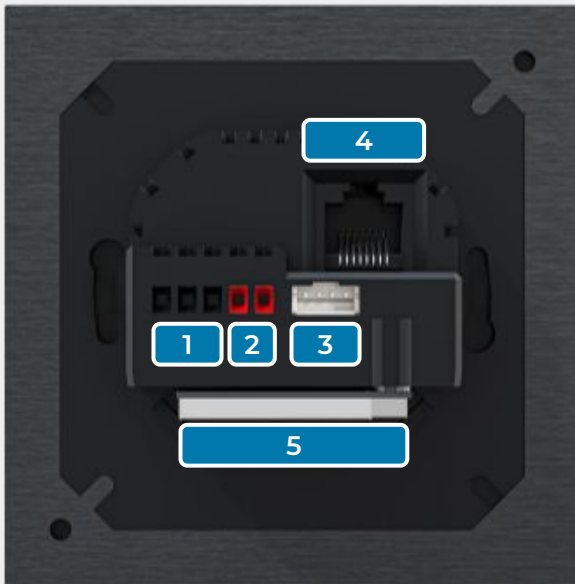

HOW TO MOUNT YOUR INSPINIA

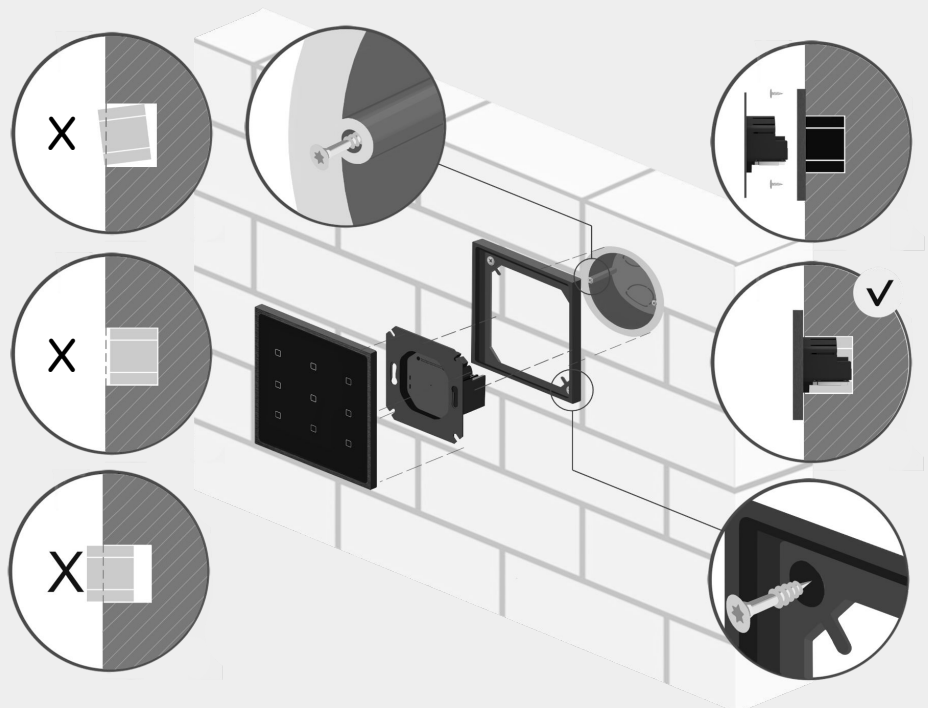

Local Web Interface

Default IP : 192.168.2.100
Username : admin
Password : aEuXW6gn

